




Wuxi Jialong Heat Exchanger Manufacturing Co.,Ltd

No.5,Xianguang Rd.,Biomedicine Industrial Area,Mashan,Binhu District,Wuxi,214091,P.R.China

www.wxjl.cn

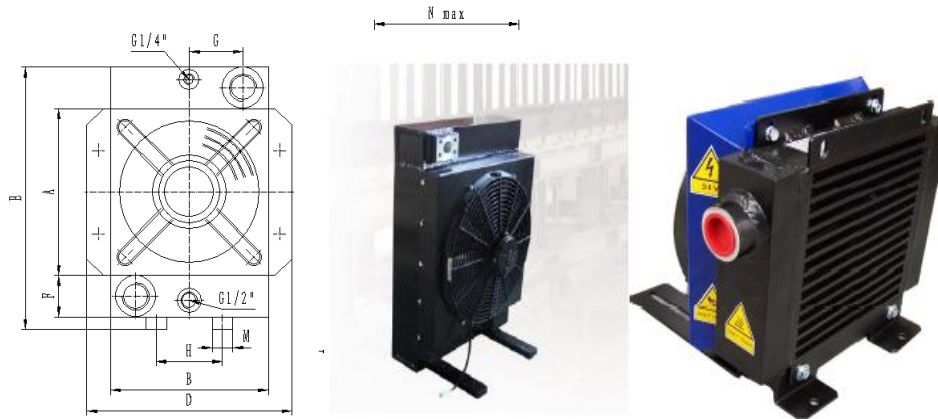

Model	JLHY001	JLHY002	JLHY003	JLHY004	JLHY005	JLHY006	JLHY007	JLHY008	JLHY009	JLHY010	JLHY011
A	250	300	400	400	500	650	800	800	1050		1200
B	245	302	396	396	411	557	557	660	915		1206
C	63	63	63	94	94(63)	94	94	140	94	113	140
D	300	355	451	451	466	607	608	722	995		1276
E	315	415	515	535	640	790	940	960	1352		1520
F	50	50	50	60	60	60	60	70	110		110
G	92	115	160	160	165	235	235	280	390		532
H	100	150	200	200	200	310	310	400	440		525

I	150	200	200	200	250	250	250	250	215	210	
K	200	250	250	250	300	300	300	300	580	750	
L	15	15	15	15	20	20	20	20	40	50	
M	25	25	25	25	30	50	50	50	65	100	
N	175	370	400	400	400(410)	450	450	590	650	790	900
O	1"BSP	1"BSP	1"BSP	1 1/4"BSP	1 1/4(1)"BSP	1 1/4"BSP	1 1/4"BSP	1 1/2"BSP			
P									1182	1332	
Q									635	710	
R									91	94	
S									780	1064	
T									15	20	
Fan Dia.(mm)	167	225	305	305	350	450	450	550	900	1000	
Rotate speed(rpm)	3250	3000	2950	3100	1500	1500	1000-1500	1000	1500	1500	
Yawp(db)	71	74	76	77	79	79	79	79	88	98	
Voltage(v)	12/24	12/24	12/24	12/24	12/24	230/400	230/400	230/400	230/400	400/690	400/690
Power(KW)	0.08	0.15	0.2	0.2	0.27	0.55	0.55	1.1	2.2	5.5	11
Volume(L)	1	1.9	2.9	5.2	6.3	9.4	10.6	17.7	25	31	55
Working pressure(bar)	26	26	26	26	26	26	26	26	10	10	10
Weight(kg)	5.4	7.3	10.8	15.2	19.5	35	42	75	91	110	210

Remark: (1) JLHY001-JLHY006 can be installed with DC motor

(2)all models can be installed with AC motor

Applications:

The units can be used for cooling:mineral oil,synthetic oil,bio oil,HFA B C D liquids,water/glycol mixture,containing 50% antifreeze and corrosion inhibitors

Function:Heat will be transferred from the fluid to the cooling air flow