


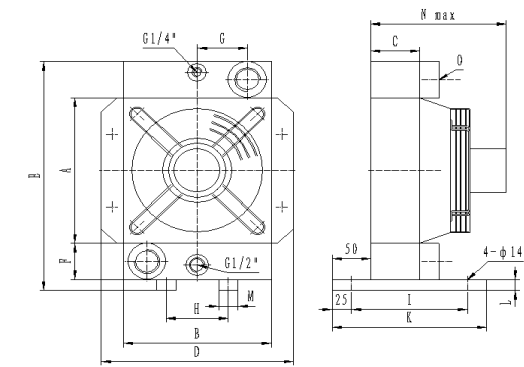

CODE NUMBER	JLHY001	JLHY002	JLHY003	JLHY004	JLHY005	JLHY006	JLHY007	JLHY008	JLHY009	JLHY010	JLHY011
A	200	300	400	400	500	650	800	800	1050	1200	
B	191	302	396	396	411	557	557	651	915	1206	
C	63	63	63	94	94	94	94	140	94	113	140
D	248	355	451	451	466	607	608	722	995	1276	
E	315	415	515	535	690	790	940	960	1352	1520	
F	50	50	50	60	60	60	60	70	110	110	
G	65	115	160	160	165	235	235	280	390	532	
H	80	150	200	200	200	310	310	400	440	525	
I	150	200	200	200	250	250	250	250	215	210	
K	200	250	250	250	300	300	300	300	580	750	
L	15	15	15	15	20	20	20	20	40	50	
M	25	25	25	25	30	50	50	50	65	100	
N	175	370	400	400	400	450	450	590	650	790	900
O	1" BSP	1" BSP	1" BSP	11/4" BSP	11/4(1)" BSP	11/4" BSF	11/4" BSF	11/2" BSP			
P									1182	1332	
Q									635	710	
R									91	94	
S									780	1064	
T									15	20	
Fan Diameter(mm)	167	255	350	385/350	500	500	630	900	900	1000	
Fan speed(rpm)	3250	3000	2950	3100	1500	1500	1000-1500	1000	1500	1500	
Motor voltage(v)	12/24	12/24	12/24	12/24/230	12/24/230	230/400	230/401	230/402	230/403	400/690	400/691
Heat rejection [kW @ 30 °C ambient temperature]	1.5-3.5	3-8	5-12	6-13	16-21	20-26	24-30	28-38	46-89	60-135	131-205
Volume(l)	1	1.9	2.9	5.2	6.3	9.4	10.6	17.7	25	31	55
Working pressure(bar)	26	26	26	26	26	26	26	26	10	10	10
Weight(kg)	5.4	7	10.6	15.2	19.5/18.2	35/29.6	42/34.8	75/62.7	91	110/90.5	210/160

MOQ:10PCS
Delivery time:about 30days after order confirmation

Applications:
The units can be used for cooling:mineral oil,synthetic oil,bio oil,HFA B C D liquids,water/glycol mixture,containing 50% antifreeze and corrosion inhibitors
Function:Heat will be transferred from the fluid to the cooling air flow